

A photograph of an industrial facility, likely a refinery or chemical plant, featuring a complex network of pipes, valves, and level gauges. The scene is partially covered in snow, suggesting a cold environment. A prominent vertical level gauge is visible on the left, with a scale ranging from 0 to 30 feet. A blue Questtec sensor is mounted on a pipe in the upper right. The background shows more industrial structures and a clear sky.

MAGNE-TRAC™

Product Catalog

QTS
Quest-Tec Solutions
The New Standard of Level

QTS
Quest-Tec Solutions
The New Standard of Level

Questtec
SOLUTIONS

The New Standard of Level

CONTENTS

SECTION	PAGE
01 A Leader In Liquid Level Measurement	01
02 Magnetic Level Indicator Components	05
03 Safe & Economical Measurement with..... Magne-Trac Products	10
04 Optional Equipment.....	14
05 Accessories: Transmitters & Switches	16
06 Custom Bridle Solutions.....	21
07 Specification Model Guide	23

1

A LEADER IN

LIQUID LEVEL
MEASUREMENT

MAGNE-TRAC™

A LEADER IN LIQUID LEVEL MANAGEMENT

ABOUT QUESTTEC

Questtec Solutions has a long history of quality, experience, and care in the development and engineering of the liquid level gage and valve product lines.

Over the past fifty years, under the direction of Daniel Measurement and Control, **Questtec Solutions'** products have been consistently refined to remain one of the industry leaders in liquid level measurement. Today, **Questtec Solutions** carries on this legacy with renewed dedication in order to bring you real solutions.

Questtec Solutions, employs over 125 years of collective experience with all aspects of the liquid level gage and valve product lines. With a new state-of-the-art manufacturing facility, and custom weld shop fabrication services, **Questtec Solutions** is able to provide flexibility to tailor to its customer's specific needs.



125+ YEARS

of collective experience in liquid level gage and valve product lines



NEW STATE-OF-THE-ART MANUFACTURING FACILITY



CUSTOM WELD SHOP FABRICATION SERVICES

provide flexibility to tailor to its customer's specific needs

*When choosing your liquid level measurement solutions provider, why not choose the best? The symmetry of a field-tested, reputable product, coupled with the energy of new management, has positioned **Questtec Solutions** to be best suited to assist you in solving your liquid level measurement challenges.*

Questtec Solutions delivers engineered solutions to meet the most complex level bridge requirements.

In addition to the existing Daniel Liquid Level Gage and Valve line, this new facility, allows **Questtec Solutions** to offer new products, which include:



GLASS-TRAC LIQUID LEVEL GAGES & VALVES, LEGACY DANIEL LEVEL GAGES & VALVES




LEVEL-TRAC STEAM & WATER LEVEL INDICATORS & ALARMS



STEAM-TRAC STEAM & WATER GAGES



TRANSMITTERS & SWITCHES

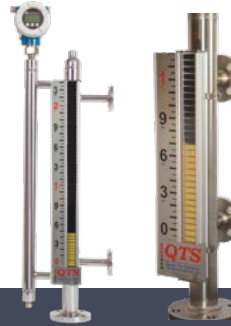

MAGNE-TRAC MAGNETIC GAGES



BRIDLE SOLUTIONS

WHY CHOOSE US

At Questtec Solutions, we strive to exceed our customer's expectations by using a hands-on approach.

For every project, we take our customers through a step-by-step process to identify both cost efficient options, as well as, effective solutions for even the most challenging applications. Our approach, high quality products, and experienced team members are testimony to customer confidence in **Questtec Solutions** as a leader in the liquid level instrumentation industry.

✓ **ENGINEERED SOLUTIONS**

✓ **WORLD CLASS MANUFACTURING FACILITY**

✓ **FULL-RANGE CAPABILITIES**

✓ **TOP NOTCH WELDING FACILITY**



READY TO SPEC? TURN TO "07: SPECIFICATION MODEL GUIDE"

MAGNE-TRAC™

A LEADER IN LIQUID LEVEL MANAGEMENT



ENGINEERED SOLUTIONS

With collaborative efforts of our dynamic outside sales team and network of domestic and international product representatives, we provide quick insight and responsiveness that customers warrant. In addition, our knowledgeable inside sales team will work alongside production staff to deliver flexible lead times, a variety of options for customized bids, and explore all possible solutions for each individual project.



FULL-RANGE CAPABILITIES

Engineering operations are an essential aspect of developing, adapting, and refining any product line. We offer complete engineering services to all of our customers. From the early development stages of projects, our accomplished engineers will review applications to find efficient solutions. Our approval drawings provide real options for customers' application in regards to applicable code and standards. We recognize that focusing on the engineering of each unit benefits in the assimilation of our products for seamless operations.



WORLD CLASS MANUFACTURING FACILITY

Our manufacturing is split into three distinct skill centers: machining, fabrication, and assembly. All shop work is carefully documented and inspected throughout the manufacturing process. Our production planners follow assigned orders, and communicate job specific requirements to the shop floor. We maintain focus on quality, speed, exceeding customer expectations.

CNC machining and laser engraving capabilities



TOP NOTCH WELDING FACILITY









QUALIFICATIONS

Section IX Weld Procedures (WPS)	Procedure Qualifications (PQR)
Welder Certification (Level II Weld Inspector on Staff)	Conforms with PED (Pressure Equipment Directive)
Standard Welds GTAW	MTR (Material Test Reports)
PMI (Positive Material Identification)	Pressure Piping Stamp (PP)
NB-415 Accreditation of R Repair Organizations (R Stamp)	CNC Precision Manufacturing
ASME "S" & "R" Stamp and ANSI / ASME B 31.1, B31.3	Over 35 Weld Procedures for numerous material grades

TESTING PROCEDURES

PWHT (Post Weld Heat Treat)	Dye-Penetration (performed in-house)
Radiography	Ultrasonic
Magnetic Particle Testing	Destructive Testing


APPROVALS

 ATEX	 FM	 CSA	 NACE	 CRN	 IEC	 ISO 9001:2008 REGISTERED	 ASME SEC. I DIV 1 BPVC CERTIFIED
---	---	--	---	---	--	--	---

APPLICATION OPPORTUNITIES

YOUR SOLUTION FOR LIQUID LEVEL MEASUREMENT

	CHEMICAL & PETROCHEMICAL
	METALS & MINERALS
	REFINING
	OIL & GAS
	POWER GENERATION
	AEROSPACE
	FOOD PROCESSING
	PULP & PAPER

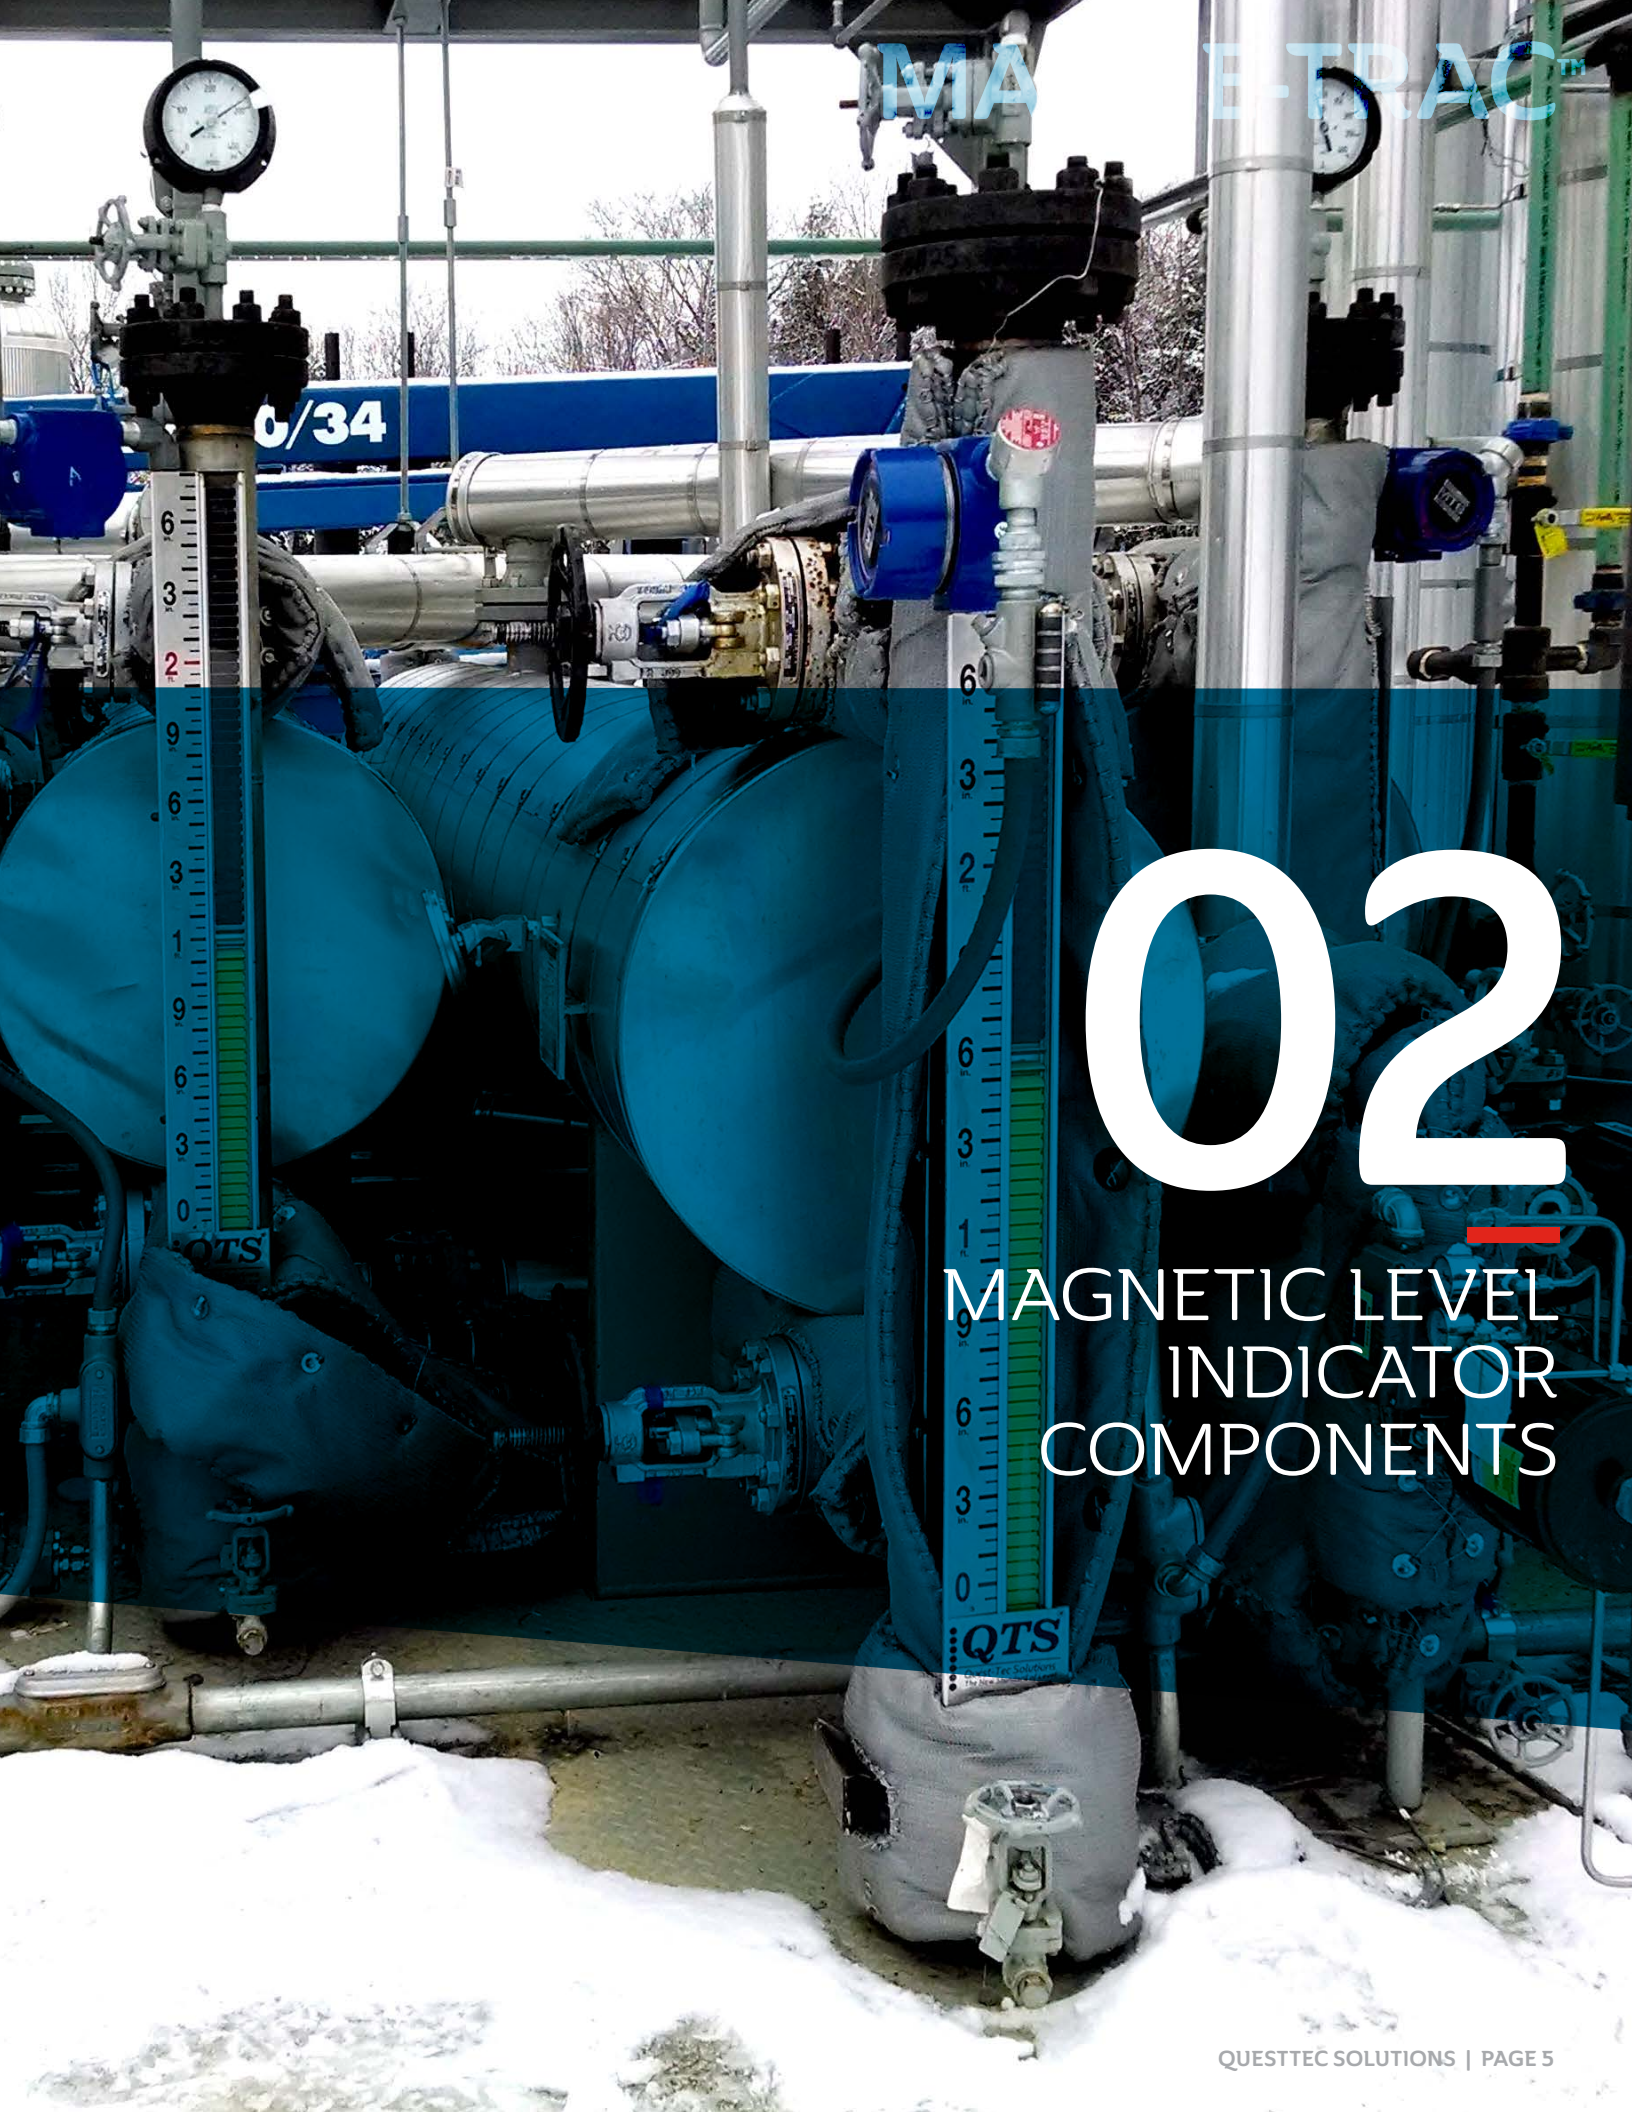

02

MAGNETIC LEVEL INDICATOR COMPONENTS

MAGNETIC LEVEL INDICATOR COMPONENTS

What is a Magnetic Level Indicator, or MLI?

At **Questtec Solutions**, we have built our business on a readiness to adapt to specific customer requirements in terms of customer materials, fabrication, and delivery requirements. Our standard configuration is by no means the limits to our capacity of supply.

A Magnetic Level Indicator (MLI) consists of 5 major components

Constructed of non-magnetic materials including standard 316 SST. Exotic materials such as Alloy 20 & Hastelloy C are available. Traditional inlet & outlet mounted design displaying liquid level to match the vessel level. Complete with flange end closure for accessibility to the float. Magne-Trac chambers are available to ASME 31.1 and 31.3.

FEATURES

Innovative Flag Design Maximizes Magnetic Field

Wide Flags for Enhanced Indicator View

Impact Resistant Polycarbonate Indicator Window

Corrosion Resistant Moving Parts

Wide Variety of Materials

Available to ASME 31.1 / 31.3 Standards



1

INDICATOR

Indicators provide a high-contrast visual representation of the liquid level.


[LEARN MORE, PAGE 9](#)

A chamber is custom-engineered and constructed per the highest manufacturing standards. A wide range of non-magnetic materials such as stainless steel, exotic alloys, and hard plastics are available for construction.

[LEARN MORE, PAGE 12](#)

2


CHAMBER

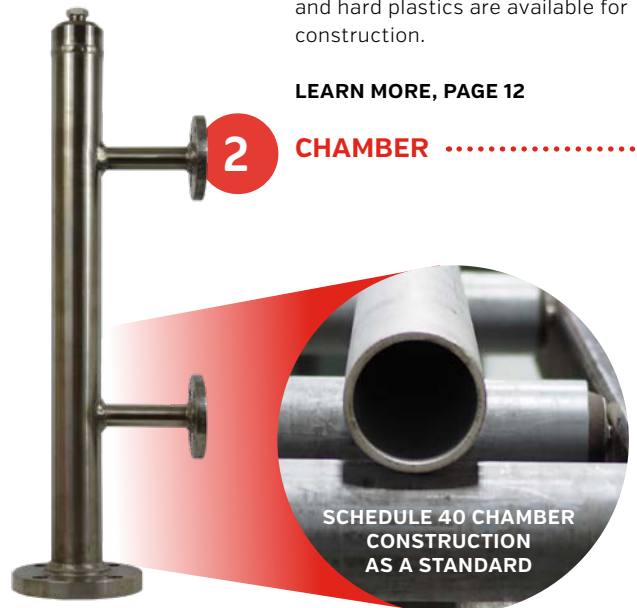

SCHEDULE 40 CHAMBER CONSTRUCTION AS A STANDARD

MAGNE-TRAC™

MAGNETIC LEVEL INDICATOR COMPONENTS

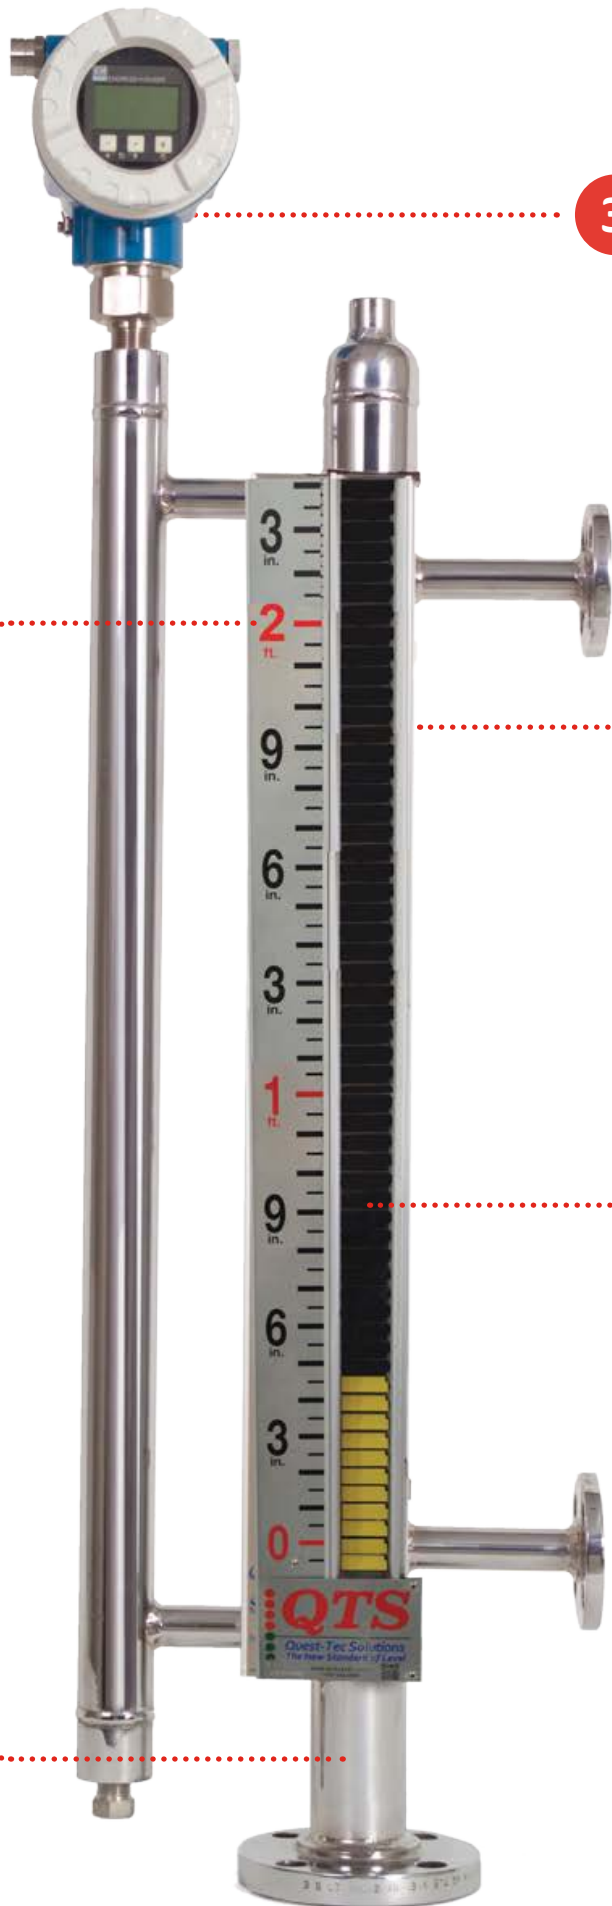

3



TRANSMITTER
Loop-powered level transmitters expand the functionality of a magnetic level indicator by providing process data back to the control room. (Magnetostrictive or Guided Wave Radar, as shown.)

LEARN MORE, PAGE 17 & 18

4



SWITCH
Externally mounted magnetic level switches expand control capabilities of MLIs. These can be used as latching level alarms or level controls by sensing the position of the float in the chamber.


LEARN MORE, PAGE 19

5



FLOAT
Engineered and designed to solve each level application, the float is the science behind accurate magnetic level measurement. Size, volume, weight, buoyant force, and construction technique are variables carefully considered before each float is manufactured. Smooth Autogenous welds on all floats producing an ultra-smooth weld, without bead which could interfere with the float's motion.

LEARN MORE, PAGE 8

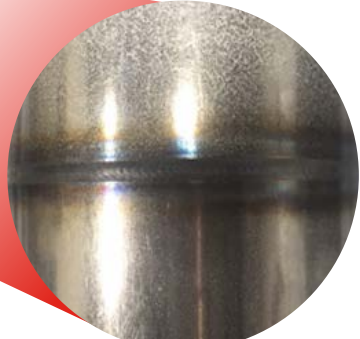


MAGNE-TRAC™

MAGNETIC LEVEL INDICATOR COMPONENTS

THE HEART OF THE QUESTTEC FLOAT TECHNOLOGY

Precision Manufactured Float: The magnetic float is the most crucial component within Questtec Solutions' magnetic level indicators.

Constantly pushing the limits of design structure, buoyancy, density, weight and pressure Questtec stays on the cutting edge of innovation. Our engineers aim to provide customers with the most effective solutions no matter how difficult the applications or extreme the environments. Questtec boast solutions for a variety of unique high pressure/high temperature, flashing, interface and corrosive processes.

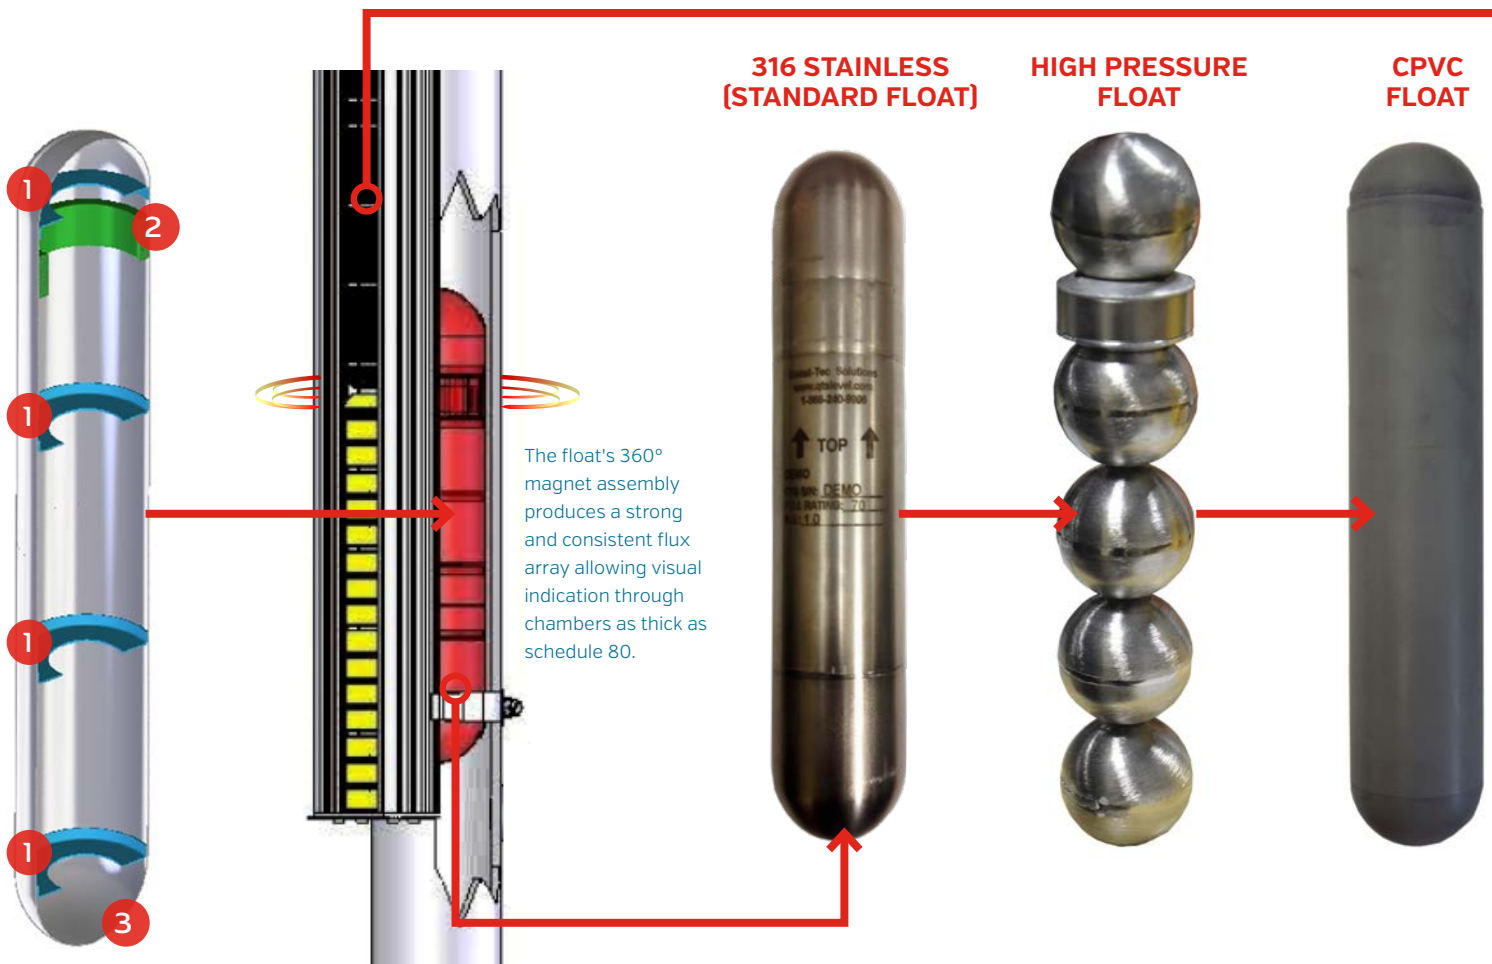

- 1. STIFFENING RINGS;
- 2. MAGNET;
- 3. FLOAT BODY

CAPABILITIES

Process pressures up to 4,500+ psig [310 bar]¹

Process temperatures up to 1,000°F [538°C]¹

Total level specific gravities as low as 0.33¹

Interface float designs available for liquid specific gravity differentials as little as 0.1

Adequate buoyancy to operate effectively and freely in many viscous liquids, including crude oil

¹maximum capabilities can vary depending on combination of pressure, temperature, and media specific gravity

WIDE FLAG INDICATOR DESIGN

Standard indicators consist of anodized aluminum housing; black & yellow rotating flags; and a clear UV scratch resistant polycarbonate window.

Each flag is 1.4" wide to heighten overall viewing capabilities from up to 200ft. The non-corrosive flag materials also eliminate problems with deterioration often encountered with market standard aluminum flag/stainless steel pins. Magne-Trac™ indicators are constructed with a UV scratch resistant polycarbonate window as standard, eliminating the fragility often encountered with glass while still forming a high integrity fit. The tightly sealed housing contains a single column wide flag assembly all aligned within an extruded aluminum case.

SCALE OPTIONS

In addition to the standard stainless steel scale (graduated in feet and inches), other custom scale options are available

Inches only

Offset zero (plus & minus scale divisions)


Negative/Positive (boiler service)

Percent (0 to 100)

Metric (mm/cm)

Volumetric (gallons, liters)

Decimal feet (0.1ft or 0.01ft.divisions)

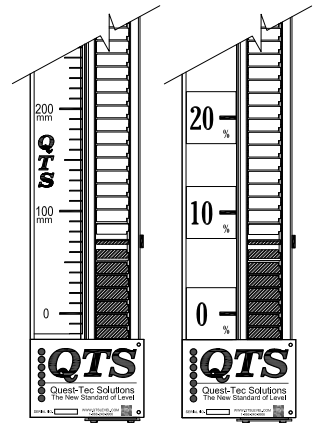

Given the characteristics of every vessel are different, drawings or strapping tables must be supplied.

EACH FLAG CONTAINS TWO HIGH STRENGTH MAGNETS



200 FEET LEVEL VIEWING





MAGNE-TRAC

3

SAFE &
ECONOMICAL
MEASUREMENT
WITH MAGNE-TRAC PRODUCTS

QTS
Quest-Tec Solutions
The New Standard of Level
MT-002583 www.QTSLEVEL.COM 1-866-240-9906

MAGNETIC LEVEL INDICATOR SPECIFICATION

The Questtec Magne-Trac Engineered to your Specifications!

In applications for extreme pressure, temperature, vibration, and highly corrosive or hazardous material, the Magne-Trac gage will perform where others fail. Features include lower installation costs, easy to read liquid level indication, and low maintenance. The Magne-Trac gage is constructed of non-magnetic materials including standard 316 SST. Exotic materials such as Alloy 20 & Hastelloy C are also available. Traditional inlet & outlet-mounted design display liquid level to match the vessel level. Comes complete with flange end closure for accessibility to float. Magne-Trac chambers are available to ASME 31.1 and 31.3.



FEATURES	
Innovative Flag Design Maximizes Magnetic Field	Wide Flags for Enhanced Indicator View
Low Specific Gravities	Corrosion Resistant Moving Parts
Wide Variety of Materials	High Pressure Applications
Available to ASME B31.1/31.3 Standards	

SPECIFICATIONS		
Measuring Range	Standard single section	12 to 216in
	Multi section (custom)	>216in
Temperature Range	-320°F to 800°F	
Pressure Range	Full Vacuum to 4500 PSIG	
Minimum Specific Gravity	As low as 0.33	

*Consult factory for additional limits/options

MATERIALS OF CONSTRUCTION			
Chamber Materials	Standard Alloys	304/304L 316/316L Other 300 series stainless	
	Plastics/ Composites	CPVC PVDF [KYNAR]	
	Exotic Allys	Titanium, Hastelloy-C276, Alloy20	
*NACE Material available on request			
Chamber Diameters	2" Sch 40 [Std]	2 ½" Sch 40 or 80	3" Sch 40
Oversized Chamber (Flashing, Boiling & Dirty Service)	3" Sch 40 with smaller OD floats		
Process Connections	Pressure Class Ratings	ANSI 150#; 300#; 600#; 900#; 1500#; 2500#	
	Process Connection	1/2" to 10+ DN20 to DN150	
	Process Connection Types	MNPT, FNPT, Weldolet®, Sockolet®, Sockweld Flange, Weldneck Flange, Lap Joint Flange; RTJ Flanged, Plain Pipe Stub	

VISUAL INDICATION	
Indicator Flags	1.4" Wide Flag Assembly in Yellow/Black [Additional Colors Available on Request]
Indicator Housing	Anodized Aluminum Stainless Steel casing available upon request
Scale Options	Ft./Inches [Std.], Metric, Percentage, Volume, etc. Custom Scales Available

FLOAT SPECIFICATIONS	
Float Materials	316/316L, Titanium, Hastelloy-C276, Alloy 20, CPVC, PVDF [KYNAR]
Specific Gravity Range	As low as 0.33
Pressure	Up to 4500 PSIG @ 100°F
High Temp Magnets	Up to 1000°F *Selected by Questtec application

TEMPERATURE OPTIONS	
High	Insulation Blankets, Electric or Steam Tracing High Temperature Indicators, etc.
Low	Insulation Blankets, Cryogenic Insulation with Non-Frost Extensions, etc.

LEVEL TRANSMITTER & DISCRETE ALARM OPTIONS	
Transmitter Options	MTLT-5000 Magnetostrictive Guided Wave Radar [Use Page 22 for GWR Options]
Switch Options	MTLS-1A; MTLS-5A; MTLS-10A; MTLS-PNEU

MAGNE-TRAC PLUS



The Questtec Magne-Trac Plus combines the rugged versatility of the Magne-Trac with the flexibility, accuracy and reliability of a Guided Wave Radar Transmitter inserted into a Bridle-Trac Bypass Chamber.

The two independent level measurement technologies provide true redundancy with minimum vessel penetration, and maximum ease of installation with virtually maintenance-free operation. Although either instrument may be connected to the vessel, **Questtec** recommends that the bridle function as the primary chamber. By using the magnetic gage as the secondary chamber, the customer will have the option to rotate the indicator up to 180 degrees easily in the field. The two chambers may be welded or flanged together; Questtec recommends installing valves in between the magnetic gage and bridle chamber so one may be isolated if necessary.

Change in the process tank level corresponds to change in the Magne-Trac Plus chamber. The float within the chamber actuates flags for visual indication. The instrument mounted within the second chamber also reacts according to the level change.

SPECIFICATIONS

Measuring Range	Standard single section	12 to 216in
	Multi section (custom)	>216in
Temperature Range	-320°F to 800°F	
Pressure Range	Full Vacuum to 4500 PSIG	
Minimum Specific Gravity	As low as 0.33	
Unique Dual Chamber Design	True Independent Level Measurement Devices.	

*Consult factory for additional limits/options

BRIDLE-TRAC



The Questtec Bridle-Trac is an ideal means of utilizing the power of many technologies without mounting directly into process vessel.

The Questtec Bridle-Trac external chamber is a self-contained cage designed for use with our top mounting level transmitters or switches. Quality construction and a wide selection of configurations make this cage an ideal means of utilizing the power of our many technologies without mounting directly into the process vessel. The chamber is suitable for use with Guided Wave Radar, RF Capacitance Transmitters, Electronic point sensors and top mounted displacer switches. In addition, mount Level Gages and Valves to your Instrument Bridle for ease of maintenance.

SPECIFICATIONS

Sealed or flanged-top chamber options

2" and 4" nominal chamber diameters to accommodate all sensing elements, Schedule 40 pipe as a minimum

Carbon steel or 316 stainless steel materials of construction

Rugged Questtec commercial construction available as well as ASME B31.3, ASME B31.1, NACE or combined NACE and ASME B31.3 construction options

Rated for pressures up to 5000 psi (345 bar)

For applications to 842°F (450°C)

Lengths for measuring ranges to twenty feet (6.1 m)

Broad selection of process connections sizes and types

Head flange bolting included with flange-top models

Suitable for use with RF capacitance transmitters, all electronic point sensors and top mounted displacer switches

Optimal design for use with Guided Wave Radar transmitter:

- Smallest possible chamber diameters
- Pressure rating to match High Temperature, High Pressure (HTHP) and High Pressure (HP) probes
- Temperature rating to match HTHP probe
- Space above and below measuring range to accommodate measurement transition zones

ECO-TRAC

ECONOMICAL & SIMPLE



Economical & Simple: In applications that are low-pressure and operating near or at ambient pressure, an Eco-Trac is an great alternative.

The Eco-Trac is a strong featured, reliable, cost-effective package. Field adjustable visual indicator to convenient viewing with a shatter resistant viewing window; the Eco-Trac precision-engineered to ensure long service life.

FEATURES

- High Quality 1.4" Wide Flag
- 150# Flange Pressure Class
- Switches and Transmitters available for expanded functionality.
- Float Accessible via Chamber Plug

TECHNICAL

Materials	316 SST & 304 SST
Pipe Diameter	2" Sch. 40
Minimum Specific Gravity	0.65 SG
Maximum Indication Length (C-C)	72"
Pressure Rating	Full Vacuum to 285 psig
Temperature Rating	-40°F to 450°F [-40° to 232°C]
Indicator Type	Flag Indicator

*Carbon Steel / Stainless Steel Combos available upon request.
Please contact sales for details

APPLICATIONS

Oil Water Separators	Hot Wells	Surge Tanks
Stage Tanks	Day Tanks	and many others

ACCESSORIES:

TRANSMITTERS & SWITCHES



MTLS-1A 1 AMP
MTLS-5A 5 AMP



MTLS-10A
10 AMP



MTLT-5000



Guided Wave Radar

MAT:316SS



1-323-24-108
1" 150# RF SW
SA 182 316SS FLANGE

1-327-01-011
2" 150# RF ENDING BLIND
SA 182 316SS FLANGE

PN:1-323-18-108
SIZE: 1" - 150#
RFSW - SCH 40
MAT:316SS

1-323-15-332P
2" X 1/2" 300# RF THD
SA 182 316SS FLANGE



4

1-323-18-620
E 2" X 3/4" 300# RFWN
1" XXH
T:316SS

PN:1-323-15-361P
SIZE: 2" X 3/4" 150# RFWN
SCH XXH
MAT:316SS

PN:1-323-15-320P
SIZE: 2" X 1/2" 150#
RFTHD
MAT:316SS

1-323-18-622
E 2" X 3/4" 300# RFWN
1" XXH
T:316SS



OPTIONAL EQUIPMENT

1-323-15-400
2" 300# RF SW
SA 182 316SS FLANGE

1-327-01-023S
2" 150# RF ENDING BLIND
MATERIAL: 316SS FLANGE

PN:1-323-18-164
SIZE: 3/4" 300# RFSW
SCH: 40
MAT:316SS

PN:1-323-19-388P
SIZE: 1 1/2" X 3/4" 300# RF
MAT:316SS

PN:1-323-15-389P
SIZE: 1" 300# RFWN
SCH 160
MAT:316SS

PN:1-323-18-200
SIZE: 2" X 1" 300# RFSW SCH
MAT: SA 182 316SS FLANGE



1-323-18-115
150# RF SW
SA 182 316SS

PN:1-323-18-008P
SIZE: 3/4" - 150# RFWN
SCH: 40
MAT:316SS

PN:1-323-18-229
SIZE: 1" 600# RFSW
SCH: 40
MAT:316SS

PN:1-323-18-140
SIZE: 2" X 1" 150# RFSW
SCH: 40
MAT:316SS

1-323-18-704
2" 150# RF SW
SA 182 316SS FLANGE

PN:1-323-18-200
SIZE: 2" X 1" 300# RFSW SCH
MAT: SA 182 316SS FLANGE

OPTIONAL EQUIPMENT


These items are listed on the Specification Guide for items to add to our MLI.

HIGH-TEMPERATURE INSULATION



Questtec Solutions specializes in custom fiberglass insulation blankets for MLIs of all shapes and sizes. They are constructed with high-quality materials capable of constant contact with temperatures up to 1,000° F [538° C]. This insulation is available as personal protection or with heat tracing options for freeze protection or process temperature maintenance.

OVERSIZED CHAMBERS (BOILING FLUIDS, FLASHING VAPORS & DIRTY SERVICE)

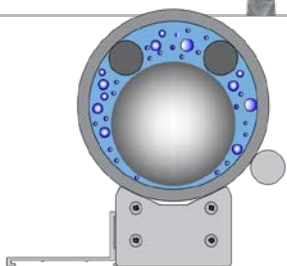

Used to uniformly heat or cool process fluid. Over sized chamber allows vapors to pass floats when a fluid is close to vapor pressure and can be used in fluids with small suspended particles. Also, used in conjunction with Teflon S coating for non-stick. [Boiling Liquids, Flashing Vapors and Dirty Service]

Applications:

- Light Hydrocarbons
- Liquid Nitrogen
- Propane
- Anhydrous Ammonia
- Methane (or any pressure-liquified gas)
- Carbon Dioxide

HERMETICALLY-SEALED FLAG INDICATOR



No gaskets: can't leak or fog

Designed to meet needs of chemical wash down, severe environments and offshore industry. Flag indicators are purged with inert gas and permanently sealed in:

- Glass tubing with 100% fused glass end seals to 550° F [287° C] process temperatures

HEAT TRACING: ELECTRIC & STEAM



For applications where process freeze protection or temperature maintenance is required, heat tracing will allow the MLI to operate uninterrupted throughout harsh, cold conditions.

Electric Heat Tracing is available in self-regulating, constant wattage, and mineral insulated varieties. Contact the factory for more information.

CRYOGENIC INSULATING & FROST EXTENSION



To facilitate operation where the product is kept cold via chillers, refrigerants, and condensers, cryogenic insulation is provided. By insulating the MLI with a specialized cryogenic jacket, process temperatures can be maintained in the liquid state down to -320° F [-195° C].

A frost extension option is available to prevent ice from collecting on the visual indicator, thereby decreasing the visibility. The extension is constructed of durable acrylic plastic and is provided standard with all cryogenic insulation

MAGNETIC PARTICLE TRAP



Magnetic Particle Traps provide protection for MLIs. The particles are composed mostly of ferrite, often from carbon steel piping. The trap keeps magnetic particles out of float chamber. The Trap fits in line with the process connection. The trap collects the particles which can be cleaned periodically to ensure continued operation of the magnetic level indicator.

5

ACCESSORIES
TRANSMITTERS
& SWITCHES

MAGNETOSTRICTIVE LIQUID LEVEL TRANSMITTER

MTLT-5000



PRINCIPLES OF OPERATION

The MTLT5000-Magnetostriuctive M or L Series is based upon the magnetostrictive principle. The sensing tube contains a wire which is pulsed at fixed time intervals. The interaction of the current pulse with the magnetic field created by the magnetic float causes a torsion stress wave to be induced in the wire. This torsion propagates along the wire at a known velocity from the position of the magnetic float and toward both ends of the wire. The microprocessor-based electronics measure the elapsed time between the start and return pulses and convert it into a 4-20 mA DC output which is proportional to the level being measured.

FEATURES

High Accuracy	4/20mA Analog with HART
AMS Aware	Two Channel Output
Explosion Proof and/or Intrinsically Safe	No scheduled Maintenance or Recalibration (due to non-contact design of sensing element)
Designed and Tested with Questtec Magne-Trac Series	

SPECIFICATIONS

LEVEL OUTPUT			
Full Range	.5 ft. to 25 ft.		
Non-Linearity	.035% of Full Scale		
Repeatability	.01% of Full Scale or 0.015in [0.381]*		
Operating Temperature	Electronics: -40°F [-40C] to 160°F [71C] Sensing Element: -40°F [-40°C] to 257°F [125°C] Chambered Temperature: -40°F 9-40°C] to 400°F [204°C]		
Output: Signal/Protocol	Standard 4-20mA DC, 2 Wire HART		
Inherent Accuracy	+,-[.] 0.039in [1mm] 20" [508mm] to 300" [7620mm]		
TRANSMITTER LOOP			
Input Voltage	10.5-28 VDC		
Fail Safe	High (>21.4mA), or Low (<3.8mA)		
CALIBRATION			
Zero Adjust Range	Anywhere within active length		
Span Adjust Range	FS > 6" from zero		
FIELD INSTALLATION			
Mounting	Z Brackets to Mag-Gage		
Wiring	2-wire twisted shielded cable 3/4" FNPT Conduit Opening		
ENVIRONMENTAL			
Housing Type	NEMA Type 4X Epoxy Coated Cast Aluminum, 316L Stainless Steel		
Humidity	0 to 100% humidity, non-condensing		
HOUSING OPTIONS/ DIMENSIONS			
Single and Dual Cavity	3/4" FNPT Conduit M20 for ATEX/IECEx Version		
Safety Approval	<table border="0"> <tr> <td>FM/CSA: Explosion-Proof Class I, Groups B, C, D Class II, Groups E, F, G Division I, NEMA 4X</td> <td>FM/CSA: Intrinsically Safe Class I, Groups A, B, C, D Class II, Groups E, F, G Division I, NEMA 4X</td> </tr> </table>	FM/CSA: Explosion-Proof Class I, Groups B, C, D Class II, Groups E, F, G Division I, NEMA 4X	FM/CSA: Intrinsically Safe Class I, Groups A, B, C, D Class II, Groups E, F, G Division I, NEMA 4X
FM/CSA: Explosion-Proof Class I, Groups B, C, D Class II, Groups E, F, G Division I, NEMA 4X	FM/CSA: Intrinsically Safe Class I, Groups A, B, C, D Class II, Groups E, F, G Division I, NEMA 4X		

GUIDED WAVE RADAR FOR REDUNDANT LEVEL TECHNOLOGY

The E&H Guided Wave Radar works with high-frequency radar pulses which are guided along a probe.

These top mounted, direct insertion radars measure interface and direct level of liquids and solids, both of high and low pressures and temperatures. GWR technology provides dependable level indication through pulsating high-frequency, microwave energy down the probe within a bypass chamber. A GWR will read the true level of the process, even in the density diverges over time.

PRINCIPLES OF OPERATION

Levelflex works with high-frequency radar pulses which are guided along a probe. As the pulse impacts the medium surface, the characteristic impedance changes and part of the emitted pulse is reflected. The time between pulse launching and receiving is measured and analyzed by the instrument and constitutes a direct measure for the distance between the process connection and the product surface.



FMP51

FMP54

FMP55

FEATURES

Mounts in bridle chamber to the Magne-Trac and provides Redundant Level	No wet calibration required, simple setup without adjustment
Simultaneous acquisition of interface layer and total level of clear and emulsions interface	Not affected by density of the medium
High Measuring accuracy	Models available to meet applications up to 752° at 5800 psi

Endress+Hauser VAR PARTNER

FMP51

Continuous level measurement of liquids, pastes and slurries but also for interface measurement. The measurement is not affected by changing media, temperature changes, gas blankets or vapors.

FEATURES	
Process connections	Thread or flange
Temperature	-40 to +200°C [-40 to +392°F]
Pressure	-1 to +40bar [-14.5 to +580psi]
Maximum measuring range	Rod 10m [33ft], rope 45m [148ft], coax 6m [20ft]
Accuracy	±2mm [0.08"]
Dielectric Constant	1.6 [Rod probe, Rope probe], 1.4 [Coax probe]

International explosion protection certificates, overfill prevention WHG SIL, marine approval, 5-point linearity protocol

FMP54

Continuous measurement in liquids under extreme conditions. Excellent for steam boilers, toxic media using gas tight feed-through guarantee. Reliable results in case of gas and steam phases. Reliable in moving surface, foam and changing medias.

FEATURES	
Process connections	Thread or flange
Temperature	-196 to +450°C [-320 to +842°F]
Pressure	Vacuum -1 to +400bar [Vacuum -14.5 to +5,800psi]
Maximum measuring range	Rod 10m [33ft], Rope 45m [148ft], coax 6m [20ft]
Accuracy	Rod ±2mm [0.08"]
Dielectric Constant	1.6 [Rod probe, Rope probe], 1.4 [Coax probe]

International explosion protection certificates, overfill prevention WHG, SIL, marine approval, steam boiler approval, 5-point linearity protocol

FMP55

Combination of capacitance and guided wave radar measuring principle in one device. The instrument guarantees safe measured value acquisition even in emulsion layers and issues level and interface layer signals simultaneously.

FEATURES	
Process connections	Thread or flange
Temperature	-50 to +200°C [-58 to +392°F]
Pressure	-1 to +40bar [-14.5 to +580psi]
Maximum measuring range	Rod 4m [13t], rope 10m [33ft], coax 6m [20ft]
Accuracy	Rod ±2mm [0.08"]
Dielectric Constant	1.6 [Rod probe, Rope probe], 1.4 [Coax probe]

International explosion protection certificates, overfill prevention WHG, SIL, marine approval



SWITCHES

Questtec level switches are hermetically sealed, non-mercury, bi-stable latching switches, which are designed for use with Magne-Trac level gages.


LEVEL SWITCHES

The bias magnet design latches the switch maintaining the contact after the level continues to rise or fall. The switch will change state when the float magnet passes by. The switches are fully adjustable and non-invasive. Level switches are mounted to the Magne-Trac chamber with all 316 Stainless Steel worm gear pipe clamps. Switch points can be changed easily at any time without any interruption to the visual indication or process.

Standard Enclosure is Cast Aluminum Junction box. Optional, Stainless Steel Junction box. Enclosure Rating is FM/CSA. Level Switches are C Clamp mounted on MLI (standard), clamp mounted on MLI with insulation pad and or attached to a switch mount rod.


SWITCH WIRING

MTLS-1A & 5A

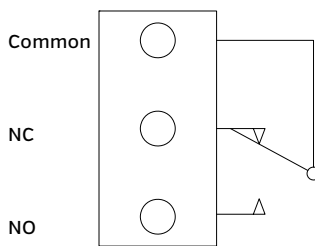


Green = Common Red [NC] = Closed when float below switch
 Red = NC
 Blue = NO Blue [NO] = Closed when float above switch

MTLS-10A

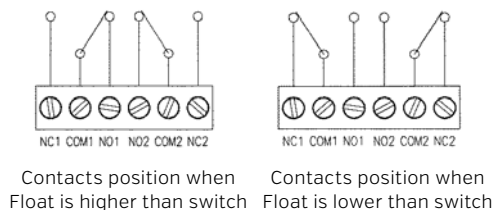

A switch mount rod is an available alternative method for mounting the MTLs to an MLI when insulation is present. The rod assembly, which is welded to the MLI chamber, allows the switch to slide along the full length. When the desired position is selected, simply tighten it in place. Consult Factory.

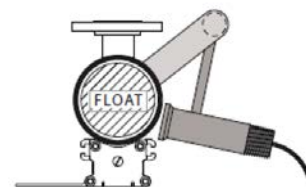



MTLS-1A
MTLS-5A



MTLS-10A




MTLS-PNEU

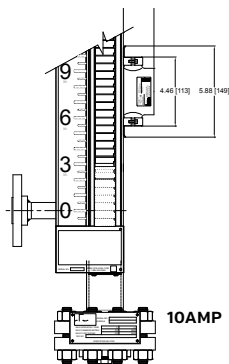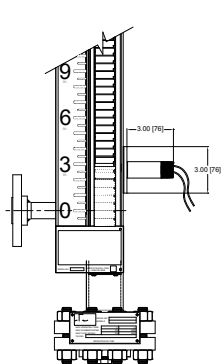

10AMP

All switches field adjustable. Loosen the mounting clamps and position at desired location. Ensure that the switch always remains in close proximity to the internal float.

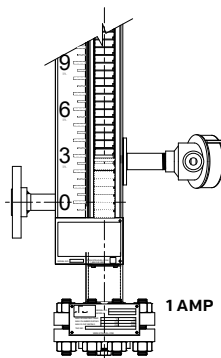

1AMP

MODEL	Max Volts	Max Current	Max Power	Dead Band	Max Temp	Min Temp	Contacts	Enclosure Classification
MTLS-1A	120 VAC/ 150 VDC	1.0 AMPS	25W	0.50 Inch	302°F [150°C]	-40°F [-40°C]	SPDT	Class 1 Div 1 Groups B, C, D
MTLS-5A	125 /250 VAC	.5.0 AMPS	1200W					
MTLS-10A	0.5 amp @ 110VDC 250VAC	10.1 AMPS	2500W	0.50 inch	248°F [120°C]	-40°F [-40°C]	2 SPDT	Class 1 & 2 Div 1 & 2 Groups B, C, D
MTLS-PNEU			Consult Factory	0.50 Inch	200°F [93°C]	0°F [-17°C]		

MAGNE-TRAC™

PRODUCTS

MAVRICK IN-TANK TRANSMITTER

MEASURE MORE WITH LESS



The Mavrick In-Tank liquid level transmitter satisfies the demand for an accurate and robust liquid-level sensor with unsurpassed flexibility to meet most process application conditions.

The Mavrick transmitter provides 3-in-1 measurement using one process opening for product level, interface level, and temperature measurements. Once the transmitter is installed and calibrated there is no requirement for scheduled maintenance or recalibration. **Set it and forget it!**

FEATURES

3-in-1 Measurement: Product, Interface, Temperature	No Scheduled Maintenance or Recalibration
Inherent Accuracy ±1mm	Integral Display
Intrinsically Safe & Hazardous Area Certified	API Temperature Corrected Volumes

APPLICATIONS

Inventory Control	Bulk Storage	Custody Transfer
-------------------	--------------	------------------

LEVEL OUTPUT

Measured Variable	Product level and interface level
Output signal /Protocol	Modbus RTU, DDA, Analog [4-20 mA], HART®
Order length	Flexible hose: 1575 mm [62 in.] to 22000 mm [866 in.] Δ§
Inherent Accuracy	±1 mm [0.039 in.]
Repeatability	0.001% F.S. or 0.381 mm [0.015 in.] * [any direction]

TEMPERATURE OUTPUT

Measured Variable	Average and multi-point temperatures [Modbus, DDA] Single point temperature [Analog, HART®]
Temperature Accuracy [Modbus, DDA]	±0.2 °C [0.4 °F] range -40 °C [-40 °F] to -20 °C [-4 °F], ±0.1 °C [0.2 °F] range -20 °C [-4 °F] to 70 °C [158 °F], ±0.15 °C [0.3 °F] range 70 °C [158 °F] to 100 °C [212 °F], ±0.5 °C [0.9 °F] range 100 °C [212 °F] to 105 °C [221 °F]
Temperature Accuracy [Analog, HART®]	±0.28 °C [0.5 °F] range -40 °C [-40 °F] to 105 °C [221 °F]

ENVIRONMENTAL

Enclosure Rating	NEMA Type 4X, IP65
Humidity	0 to 100% relative humidity, non-condensing
Operating Temperatures	Electronics: -40 °C [-40 °F] to 71 °C [160 °F] Sensing element: -40 °C [-40 °F] to 125 °C [257 °F] ◇ Temperature element: -40 °C [-40 °F] to 105 °C [221 °F]
Vessel Pressure	Flexible Hose: 260 psi [18 bar]
Materials	Wetted parts: 316L stainless steel † Non-wetted parts: 316L stainless steel, Epoxy coated aluminum

DISPLAY

Measured Variables	Product level, interface level and temperature
--------------------	--

ELECTRONICS

Input Voltage	10.5 to 28 Vdc
Fail Safe	High, Full scale [Modbus, DDA] Low, 3.5 mA default or High, 22.8 mA [Analog, HART®]
Rev. Polarity Protection	Series diode

MOUNTING

Flexible Hose	1 in. Adjustable MNPT or BSPP fitting, Flange mount
---------------	--


WIRING

Connections	4-wire shielded cable or twisted pair, Daniel Woodhead 6-pin male connector, 4570 mm [180 in.] Integral cable with pigtail
-------------	--

ELECTRICAL CONNECTIONS

Single & Dual Cavity	¾ in. FNPT conduit opening, M20 for ATEX/IECEx version
NEMA Type 4X	½ in. FNPT conduit opening Low, 3.5 mA default or High, 22.8 mA [Analog, HART®]

* Whichever is greater | Δ Contact factory for longer lengths. |
◇ Contact factory for specific temperature ranges.

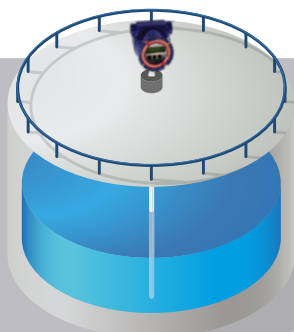

Product Level
Interface Level
Temperature

3-IN-1 MEASUREMENT

6

CUSTOM
BRIDLE
SOLUTIONS

INSTRUMENT BRIDLES SOLUTIONS

In addition to Magnetic Gage manufacturing, **Questtec** manufactures custom instrument bridles in several configurations, utilizing various technologies, including guided wave radar, buoyancy-based devices, process gages, boiler gage systems, differential pressure and other equipment needing to be attached to the bridle.



ADVANTAGES


- ✓ SINGLE POINT RESPONSIBILITY INSTRUMENTS, BRIDLE, WELDING, TESTING, DOCUMENTATION
- ✓ ISOLATION EASE OF CALIBRATION AND MAINTENANCE
- ✓ AVOID INTERFERENCE BETWEEN OTHER DEVICES
- ✓ REDUCES TURBULENCE & FOAM IMPROVES MEASUREMENT ACCURACY

7


OUR SPECIFICATION & MODEL CODE GUIDES

TYPICAL TANK CONFIGURATIONS


QUESTTEC SOLUTIONS

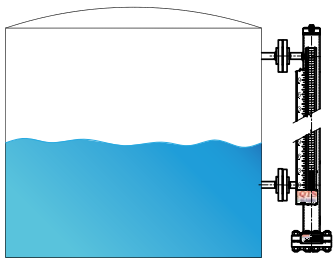


STYLE A

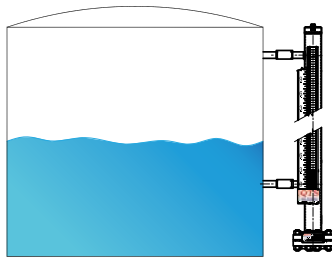


STYLE B

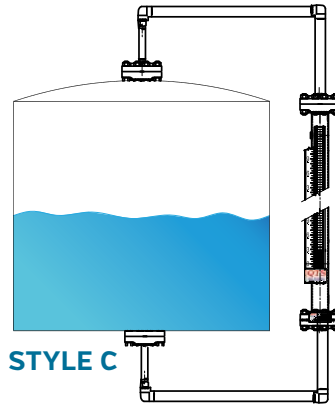


STYLE C

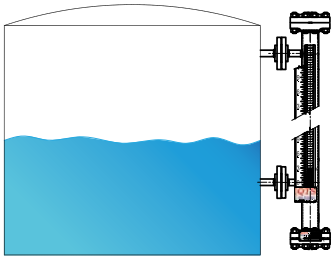

STYLE D

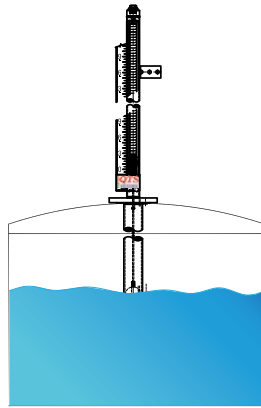

STYLE H

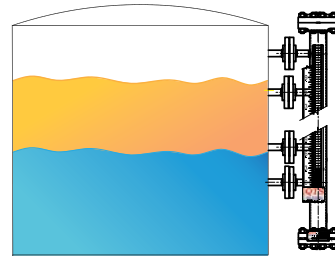

INTERFACE

MAGNE-TRAC™

SPECIFICATION SHEET

Endress+Hauser  VAR PARTNER

MAGNE-TRAC PLUS



MODEL NUMBER

The **Questtec Solutions** Magne-Trac Plus combines the Magne-Trac magnetic level gage with the Bridle-Trac bypass chamber. It may be used with our VAR Partner E&H GWR or customer specified radar for redundant level measurement. See page 4 for listing of our partners GWR models. The Magne-Trac Plus is recommended in applications that require both visual and electronic level viewing.

MTP ORIENTATION


(ONLY 1 ACCESSORY ALLOWED PER POSITION)

INDICATOR	AT TRANSMITTER	SWITCHES
<input type="radio"/> 90°	<input type="radio"/> 90°	<input type="radio"/> 90°
<input type="radio"/> 180°	<input type="radio"/> 180°	<input type="radio"/> 180°
<input type="radio"/> 270°	<input type="radio"/> 270°	<input type="radio"/> 270°




Note: Overall length will always be greater than measuring length (ML). Please specify if a max overall length is required.

MTP STYLES

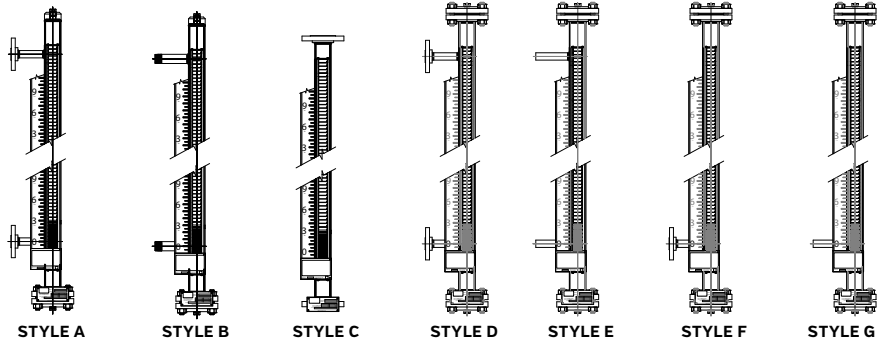

BRIDLE STYLES

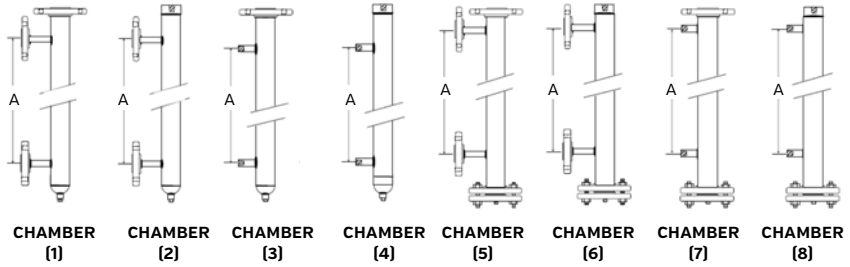


MTP	Magne-Trac Plus	MLI Material	Vessel Connection	Top Bridle Connection	Flange Class	Specific Gravity	Maximum Pressure	Maximum Temperature	"C-C" Dimension	Indicator Style	Vent/Drain	Bridle Chamber Size	Bridle Material	Options	Temp Control	Testing/Material	Transmitter/ Switching
		4S = 304 SS 4C = 304 SS/CS 6S = 316 SS 6C = 316 SS/CS MN = Monel TI = Titanium HC = Hastelloy C CP = CPVC CS = Customer Specified	04 = 1/2" 06 = 3/4" 08 = 1" 10 = 1 1/4" 12 = 1 1/2" 16 = 2" 20 = 2 1/2" 24 = 3" CS = Customer Specified	06 = 3/4" 08 = 1" 10 = 1 1/4" 12 = 1 1/2" 16 = 2" 20 = 2 1/2" 24 = 3" CS = Customer Specified	01 = 150# 03 = 300# 04 = 400# 06 = 600# 09 = 900# 15 = 1500# 25 = 2500# CS = Customer Specified [All Styles Use a Flange for End Closure]				WF = Wide Flag ST = Follower HF = High Temp Flag XX = None	XX = None XA = 1/2" Vent or Drain XB = 3/4" Vent or Drain XC = 1" Vent or Drain AA = 1/2" Top Vent & 1/2" Drain [NPT] BB = 3/4" Top Vent & 1/2" Drain [NPT] CC = 1" Top Vent & 1" Drain [NPT] AB = 1/2" Top Vent & 3/4" Drain [NPT] AC = 1/2" Top Vent & 1" Drain [NPT] BA = 3/4" Top Vent & 1/2" Drain [NPT] BC = 3/4" Top Vent & 1" Drain [NPT] CA = 1" Top Vent & 1/2" Drain [NPT] CB = 1" Top Vent & 3/4" Drain [NPT] CS = Customer Specified	16 = 2" [Std.] 24 = 3" 32 = 4" CS = Cust. Specified	3C = A105 CS 4S = 304 SS 6S = 316 SS MN = Monel TI = Titanium HC = Hastelloy C CP = CPVC CS = Cust. Specified	INDICATOR STYLE VESSEL CONNECTION MAXIMUM PRESSURE MAXIMUM TEMPERATURE "C-C" DIMENSION BRIDLE CHAMBER SIZE BRIDLE MATERIAL RADAR OPTIONS	Z = No Radar G = Guided Wave F = Free Space	SO = Slip on Flanges IV = Inverted Chamber WN = Weld Neck Flanges SL = Stub End/Lap Joint Flanges RJ = Ring Joint Flanges BW = All Butt Weld Construction B1 = ASME B31.1 B3 = ASME B31.3 SCALE/INDICATOR MS = Metric Scale PS = Percentage Scale NS = Negative Scale SH = SS Indicator Housing SS = Custom Scale [specify] FE = Non Frost Extension DI = Dual Indication IF = Interface Indication AR = Arrow Pointers	CI = Cryogenic Insulation w/ Frost Extension HB = High Temp Insulation Blanket EH = Electrical Heat Tracing FP = Freeze Protection [Electrical] ST = Steam Tracing VD = Vent & Drain Valves [Specify Type] IS = Isolation Valves [Specify Type]	CRN = ABSA Certifications NM = NACE MR0175 MT = Magnetostrictive Transmitter RX = Reed Switches [Specify Amperage] LG = Level Gage

These parameters must be based on Maximum Operating Conditions and are the basis for Float construction.

BRIDLE-TRAC

MODEL NUMBER

The **Questtec Solutions** Bridle-Trac utilizes a pipe chamber mounted directly to a vessel with two or more process connections. These connections act as an inlet and outlet that allow the liquid level in the pipe chamber to match the level in the process vessel. A Bridle-Trac may be referred to in the industry as a bridge chamber, a stilling well, a bypass chamber, a cage or a standpipe. It may be used with a customer specified radar for level measurement. All standard chambers are manufactured to Questtec's Heavy Duty Design. Requirements to ASMEB31.1, 31.3 and NACE Design is available upon request.

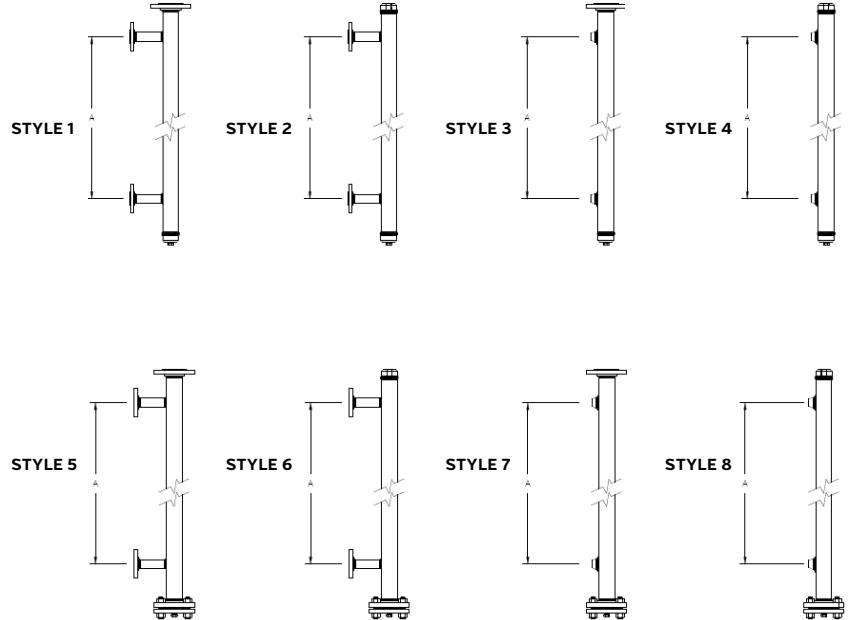

BT													
BRIDLE-TRAC™									"C-C" DIMENSION				OPTIONS
	CHAMBER MATERIAL 3C = A105 CS [Std.] 4S = 304 SS 6S = 316 SS MN = Monel TI = Titanium HC = Hastelloy C CP = CPVC CS = Cust. Specified	VESSEL CONNECTION 04 = 1/2" 06 = 3/4" 08 = 1" [STD.] 10 = 1 1/4" 12 = 1 1/2" 16 = 2" 20 = 2 1/2" 24 = 3" CS = Cust. Specified		FLANGE CLASS XX = NONE 01 = 150# 03 = 300# 04 = 400# 06 = 600# 09 = 900# 15 = 1500# 25 = 2500#			MAXIMUM PRESSURE	MAXIMUM TEMPERATURE		VENT/ DRAIN XX = None XA = 1/2" Vent or Drain [NPT] XB = 3/4" Vent or Drain [NPT] XC = 1" Vent or Drain [NPT] AA = 1/2" Side Vent & 1/2" Drain [NPT] BB = 3/4" Side Vent & 3/4" Drain [NPT] CC = 1" Side Vent & 1" Drain [NPT] AB = 1/2" Side Vent & 3/4" Drain [NPT] AC = 1/2" Side Vent & 1" Drain [NPT] BA = 3/4" Side Vent & 1/2" Drain [NPT] BC = 3/4" Side Vent & 1" Drain [NPT] CA = 1" Side Vent & 1/2" Drain [NPT] CB = 1" Side Vent & 3/4" Drain [NPT] CS = Customer Specified			
			CHAMBER STYLE 1 = See Chart [Std.] 2 = See Chart 3 = See Chart 4 = See Chart 5 = See Chart 6 = See Chart 7 = See Chart 8 = See Chart Z = Cust. Specified	TOP CONNECTION 03 = 3/8" 04 = 1/2" 06 = 3/4" 08 = 1" 10 = 1 1/4" 12 = 1 1/2" 16 = 2" [Std.] 20 = 2 1/2" 24 = 3" CS = Cust. Specified	CHAMBER SIZE 16 = 2" [Std] 20 = 2 1/2" 24 = 3" 32 = 4" CS = Cust. Specified						TEMP CONTROL CI = Cryogenic Insulation with Frost Extension HB = High Temp Insulation Blanket EH = Electrical Heat Tracing FP = Freeze Protection [Electrical] ST = Steam Tracing VD = Vent & Drain Valves [Specify Type] IS = Isolation Valves [Specify Type]	TESTING/MATERIAL CRN = Canadian Registration No. NM = NACE MR0175 TRANSMITTER/SWITCHING OPTIONS MT = Magnetostrictive Transmitter RX = Reed Switches [Specify Amperage] LG = Level Gage	

These parameters must be based on Maximum Operating Conditions and are the basis for Float construction.

RADAR
Z = None
G = Guided Wave
F = Free-Space

MAGNE-TRAC™

SPECIFICATION SHEET

LEVELFLEX FMP51

MODEL NUMBER

Levelflex FMP51 for level measurement even under extreme process conditions like high temperature and high pressure in the process industry. FMP51 offers maximum reliability even in case of moved surface and foam or when numerous tank baffles interfere with the measurement. Levelflex FMP51 is used for continuous level measurement of liquids, pastes and slurries but also for interface measurement. The measurement is not affected by changing media, temperature changes, gas blankets or vapors.



Endress+Hauser 
VAR PARTNER

LEVEL-FLEX												
LEVELFLEX FMP51												
SECTION 1: APPROVAL: AA = Non-hazardous area CA = CSA C/US General Purpose C2 = CSA C/US IS Cl.I,II,III Div.1 Gr.A-G, NI Cl.1 Div.2, Ex ia C3 CSA C/US XP Cl.I,II,III Div.1 Gr.A-G, NI Cl.1 Div.2, Ex d FB FM IS Cl.I,II,III Div.1 Gr.A-G, AEx ia, NI Cl.1 Div.2 FD FM XP Cl.I,II,III Div.1 Gr.A-G, AEx d, NI Cl.1 Div.2 8A FM/CSA IS+XP Cl.I,II,III Div.1 Gr.A-G	DISPLAY, OPERATION A = Without, via communication C = SD02 4-line, push buttons + data backup function E = *SD03 4-line, illum., touch control + data backup function	ELECTRICAL CONNECTION A = Gland M20, IP66/68 NEMA4X/6P B = Thread M20, IP66/68 NEMA4X/6P C = Thread G1/2, IP66/68 NEMA4X/6P D = Thread NPT1/2, IP66/68 NEMA4X/6P I = Plug M12, IP66/68 NEMA4X/6P	SEAL A4 = Viton, -30...150°C/-22...302°F B3 = EPDM, -40...120°C/-40...248°F C3 = Kalrez, -20...200°C/-4...392°F, saturated steam max 150°C/302°F E1 = *FVMQ, -40...150°C/-40...302°F	PROBE AA = 300 mm, rod 8mm 316L AB = 12 inch, rod 1/8" 316L AC = 300 mm, rod 12mm 316L AD = 12 inch, rod 1/2" 316L AL = 300 mm, rod 12mm AlloyC AM = 12 inch, rod 1/2" AlloyC BA = 591 mm, rod 16mm 316L, 500mm divisible BB = 23 inch, rod 0.63in 316L, 20inch divisible BC = 1091 mm, rod 16mm 316L, 1000mm divisible BD = 43 inch, rod 0.63in 316L, 40inch divisible LA = 1000 mm, rope 4mm, 316, max 150mm nozzle height, center rod MB = 1000 mm, rope 4mm 316, max 300mm nozzle height, center rod LB = 40 inch, rope 1/8" 316, max 6in nozzle height, center rod MD = 40 inch, rope 1/8" 316, max 12in nozzle height, center rod UA = 300 mm, coax 316L UB = 12 inch, coax 316L UC = 300 mm, coax AlloyC UD = 12 inch, coax AlloyC	PROBE DESIGN MB = Sensor remote, 3m/9ft cable, detachable+ mounting bracket MC = *Sensor remote, 6m/18ft cable, detachable + mounting bracket MD = *Sensor remote, 9m/27ft cable, detachable + mounting bracket	MARKING Z1 = stainless steel tag ACCESSORY MOUNTED NC = Gas-tight feed through NA = Overvoltage protection OA = Rod center washer d=75mm/2.95", 316L pipe diameter DN80/3" + DN100/4" OB = Rod center washer d=45mm/ 1.77", 316L pipe diameter DN50/2" + DN65/2-1/2" OC = Rope center washer d=75mm/ 2.95", 316L pipe diameter DN80/3" + DN100/4" OD = Rod center washer d=48-95mm/ 1.88-3.74", PEEK, interface measurement, pipe diameter DN50/2" + DN100/4"	POWER SUPPLY; OUTPUT A = 2-wire; 4-20mA HART C = 2-wire; 4-20mA HART, 4-20mA E = 2-wire; FOUNDATION Fieldbus, switch output G = 2-wire; PROFIBUS PA, switch output K = 4-wire 90-253VAC; 4-20mA HART L 4-wire 10,4-48VDC; 4-20mA HART	HOUSING C = GT20 dual compartment, Alu coated B = GT18 dual compartment, 316L A = GT19 dual compartment, Plastics PBT	PROCESS CONNECTION AEJ = 1-1/2" 150lbs RF, 316/316L flange ANSI B16.5 AQJ = 1-1/2" 300lbs RF, 316/316L flange ANSI B16.5 AQM = 1-1/2" 300lbs, AlloyC>316/316L flange ANSI B16.5 AFJ = 2" 150lbs RF, 316/316L flange ANSI B16.5 AFM = 2" 150lbs, AlloyC>316/316L flange ANSI B16.5 ARJ = 2" 300lbs RF, 316/316L flange ANSI B16.5 ARM = 2" 300lbs, AlloyC>316/316L flange ANSI B16.5 AGJ = 3" 150lbs RF, 316/316L flange ANSI B16.5 AGM = 3" 150lbs, AlloyC>316/316L flange ANSI B16.5 ASJ = 3" 300lbs RF, 316/316L flange ANSI B16.5 ASM = 3" 300lbs, AlloyC>316/316L flange ANSI B16.5 AHJ = 4" 150lbs RF, 316/316L flange ANSI B16.5 ATJ = 4" 300lbs RF, 316/316L flange ANSI B16.5 AJJ 6" 150lbs RF, 316/316L flange ANSI B16.5 AKJ 8" 150lbs RF, 316/316L flange ANSI B16.5	CALIBRATION F4 = 5-point linearity protocol F3 = *3-point linearity protocol	ACCESSORY MOUNTED NC = Gas-tight feed through NA = Overvoltage protection OA = Rod center washer d=75mm/2.95", 316L pipe diameter DN80/3" + DN100/4" OB = Rod center washer d=45mm/ 1.77", 316L pipe diameter DN50/2" + DN65/2-1/2" OC = Rope center washer d=75mm/ 2.95", 316L pipe diameter DN80/3" + DN100/4" OD = Rod center washer d=48-95mm/ 1.88-3.74", PEEK, interface measurement, pipe diameter DN50/2" + DN100/4"	

LEVELFLEX FMP54


MODEL NUMBER

Levelflex FMP54 for continuous level measurement in liquids under extreme conditions. The process connection with its ceramic-graphite seal safeguards high temperature and high pressure applications as they occur in steam boilers and toxic media like ammonia. The gas tight feed through guarantees additional safety. Only the gas phase compensation of the FMP54 gives reliable results in case of gas and steam phases. Reliable measurement in case of moving surface and foam or in changing medias.



Endress+Hauser 

VAR PARTNER

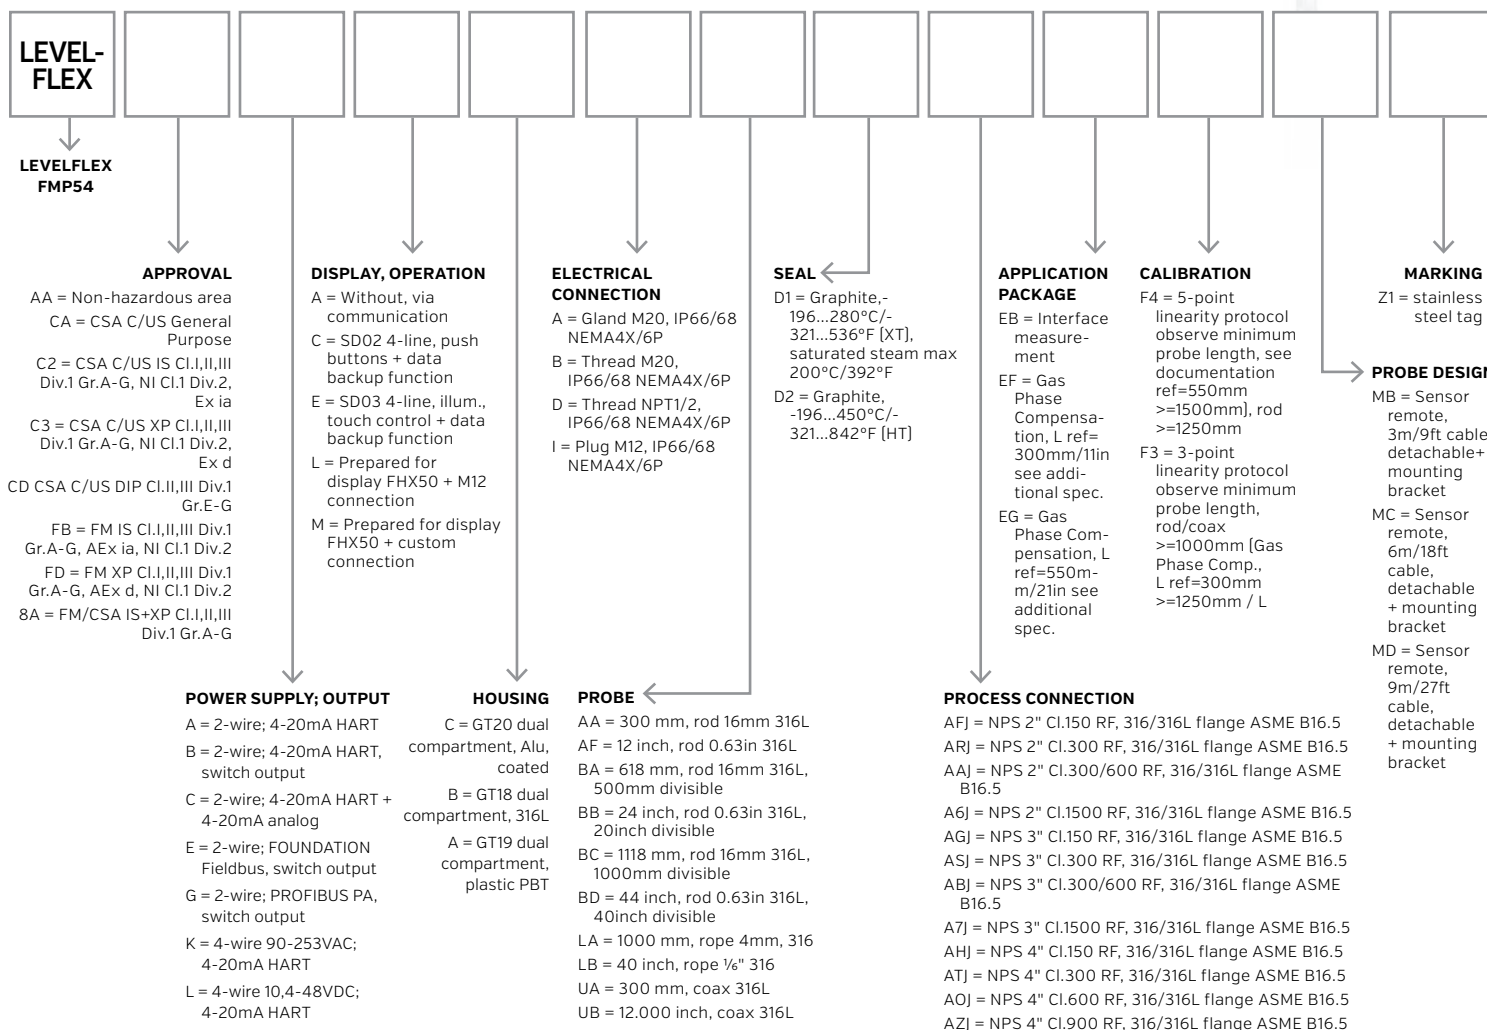

MAGNE-TRAC™

SPECIFICATION SHEET


LEVELFLEX FMP55

MODEL NUMBER

Levelflex FMP55 guided radar with SensorFusion offers the worldwide first combination of the capacitance and guided radar measuring principle in one device. The instrument guarantees safe measured value acquisition even in emulsion layers and issues level and interface layer signals simultaneously. This makes the FMP55 Multiparameter the new standard in interface measurement especially in the oil & gas, chemical and petrochemical industry.




Endress+Hauser 
VAR PARTNER

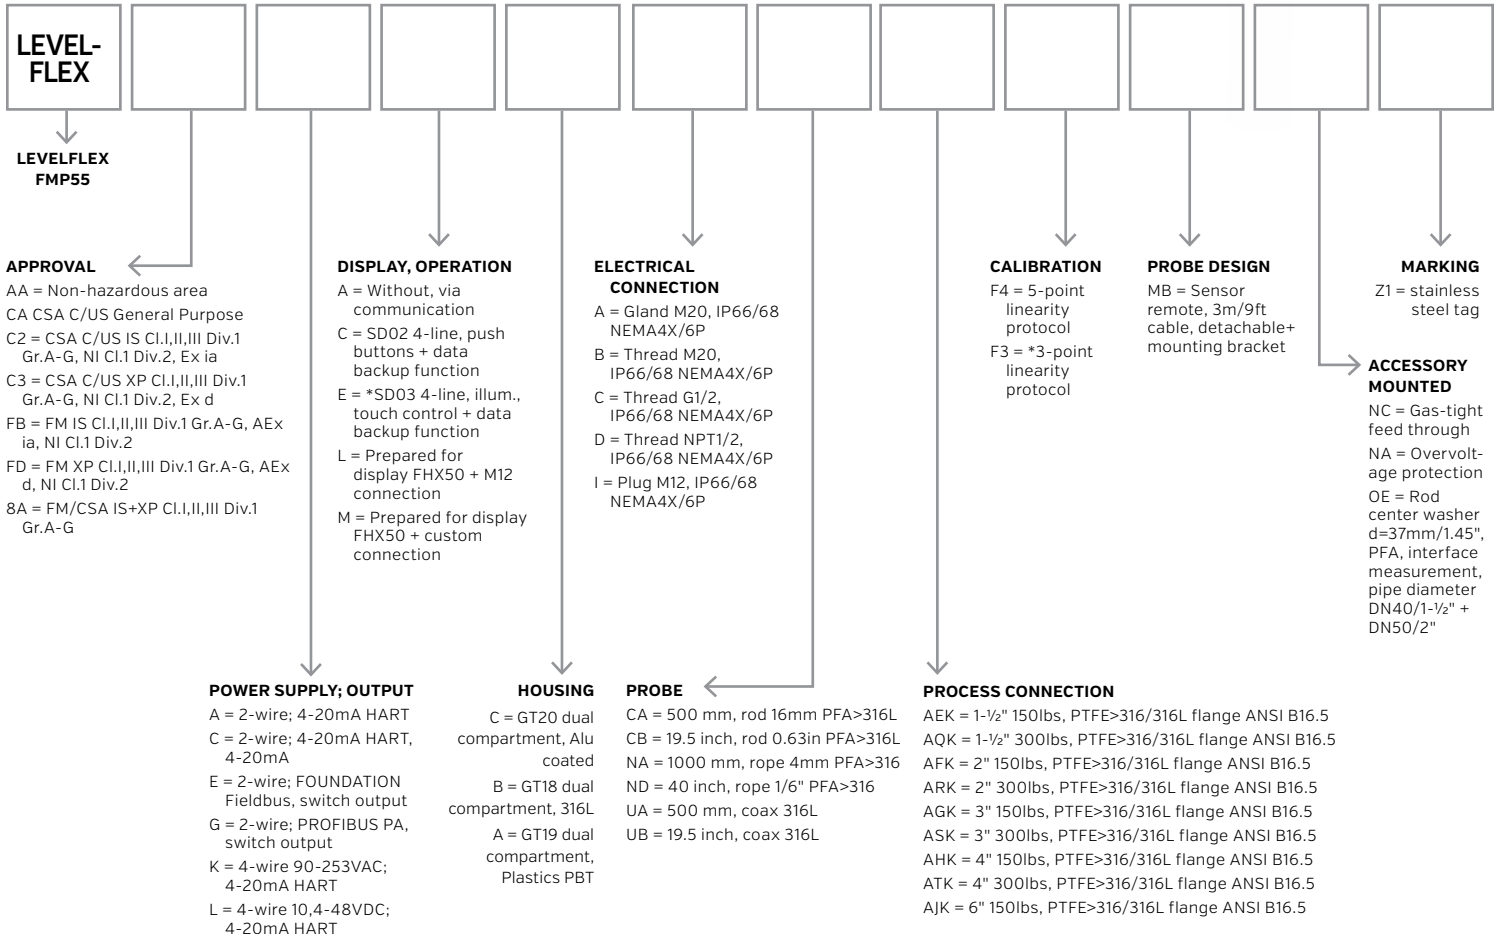

MTLT 5000 MODEL NUMBER

The MTLT-5000 is based upon the magnetostrictive principle. The sensing tube contains a wire which is pulsed at fixed time intervals. The interaction of the current pulse with the magnetic field created by the magnetic float causes a torsion stress wave to be induced in the wire. This torsion propagates along the wire at a known velocity, from the position of the magnetic float and toward both ends of the wire. A patented piezo-magnetic sensing element placed in the transmitter assembly converts the received mechanical torsion into an electrical return pulse. The microprocessor-based electronics measures the elapsed time between the start and return pulses and converts it into a 4-20 mA DC output which is proportional to the level being measured.

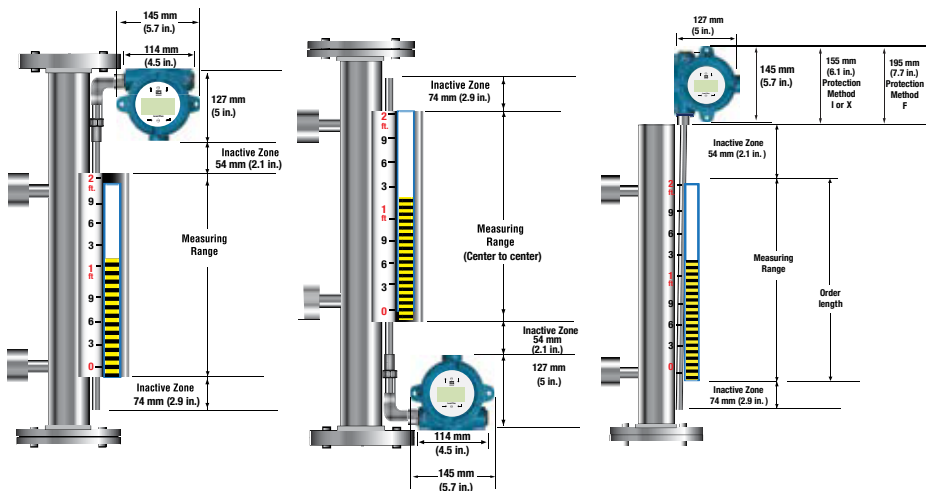


ELECTRONICS MOUNTING '4'
TOP RIGHT

ELECTRONICS MOUNTING '6'
BOTTOM RIGHT

ELECTRONICS MOUNTING '1'
TOP MOUNT

"QTS STANDARD"

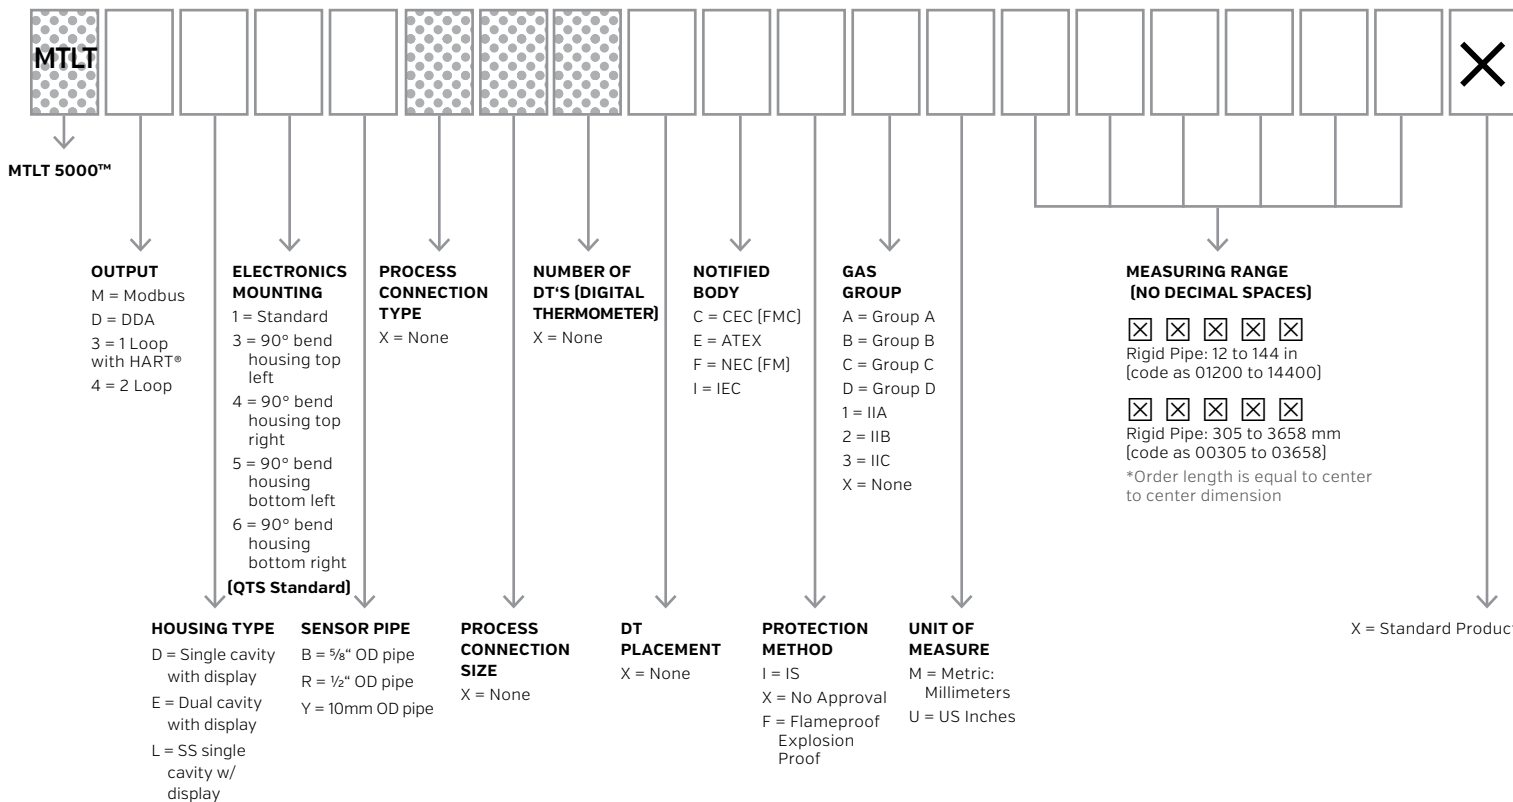



MAGNE-TRAC™

SPECIFICATION SHEET

MAVRICK MODEL NUMBER

The Questtec Maverick In-Tank transmitter is configured with a flexible hose constructed of 316L stainless steel that can be ordered in lengths from 120 inches to 866 inches with a 4-20mA. Once installed and calibrated there is no requirement for scheduled maintenance or recalibration.

FEATURES	
No maintenance required	Multidrop HART Communications
FM Approved Explosion Proof/IS	NEMA 4x/7 enclosures
Modular design	Adjustable output damping
Up to .001" resolution	2-wire loop powered
RFI/EMI protection	Available up to 866 inches
Process temperature range: -30 to 400°F	Offers a 4/20 mA 2-wire loop powered circuit for continuous level measurement

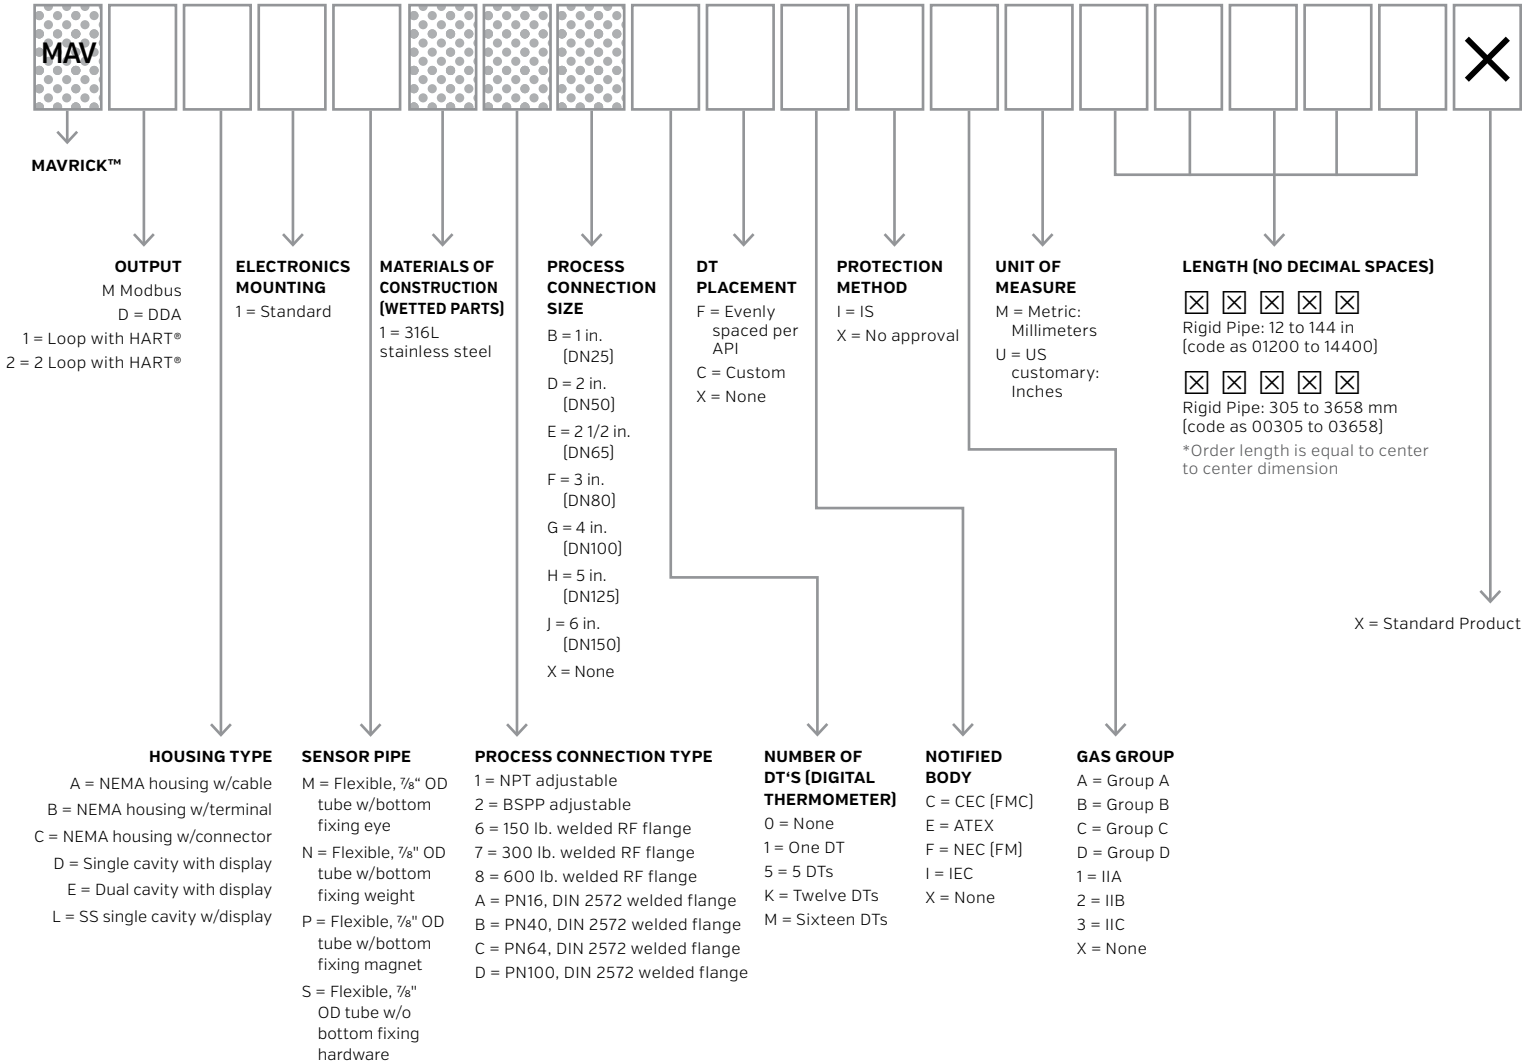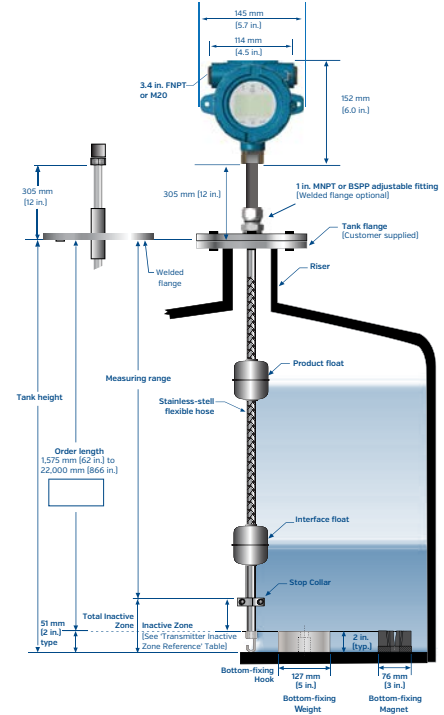

3
in.

Questtec is an International Company with Representatives based throughout the world. Our Partners can assist with Commissioning Start Up and Calibration, 24 Hour Service and Repair Support.

866.240.9906

IMMEDIATE HELP VIA-REMOTE MAINTENANCE

Using the remote maintenance service TeamViewer, the Questtec service technician can assist you immediately, check the instrument configuration and perform certain analysis.



QTS

Quest-Tec Solutions
New Standard of Level

WWW.QTSLEVEL.COM
1-866-240-9906





40,000ft² climate controlled

Questtec Solutions Registration #0736



ASME "S" & "R"
Stamp Cert# 51,922



QMS
ISO 9001:2008
QMS, Cert.#0736



ASME Sec. VIII
Div I BPVC
Certified
Manufacturing

CNC Precision
Machining for all
components

Questtec

SOLUTIONS

13960 S. Wayside, Houston, Texas 77048

Toll Free: 866.240.9906

Tel: 281.240.0440 | Fax: 281.240.2440

sales@QTSLevel.com

WWW.QTSLEVEL.COM

400-04 10/18